

TScore can integrate with the Eurotramp HSTS / QIRA automatic time-of-flight (ToF), HD and Synchro equipment.

This is a new feature of TScore that should be treated as a ‘beta’ release, as it has not had any testing against a real system yet! The service and emulators appear to work, and a test against actual HDTs was successful, but until we have used it in a real competition environment, we cannot be certain that it will work.
You are welcome to try it of course but be certain to have a manual backup.

The diagram below shows the way the systems communicate, so you can easily set them up in your network.


For the illustration, all devices are attached to the same network (192.168.0.x).

So for example, you may typically have the TScore data base running as 192.168.0.2.

The TScore Client for Panel 1 as 192.168.1.11

The QIRA ToF software is running on its own workstation – 192.168.1.41

The new ‘TScore WebService’ program running on either the TScore or QIRA laptop.

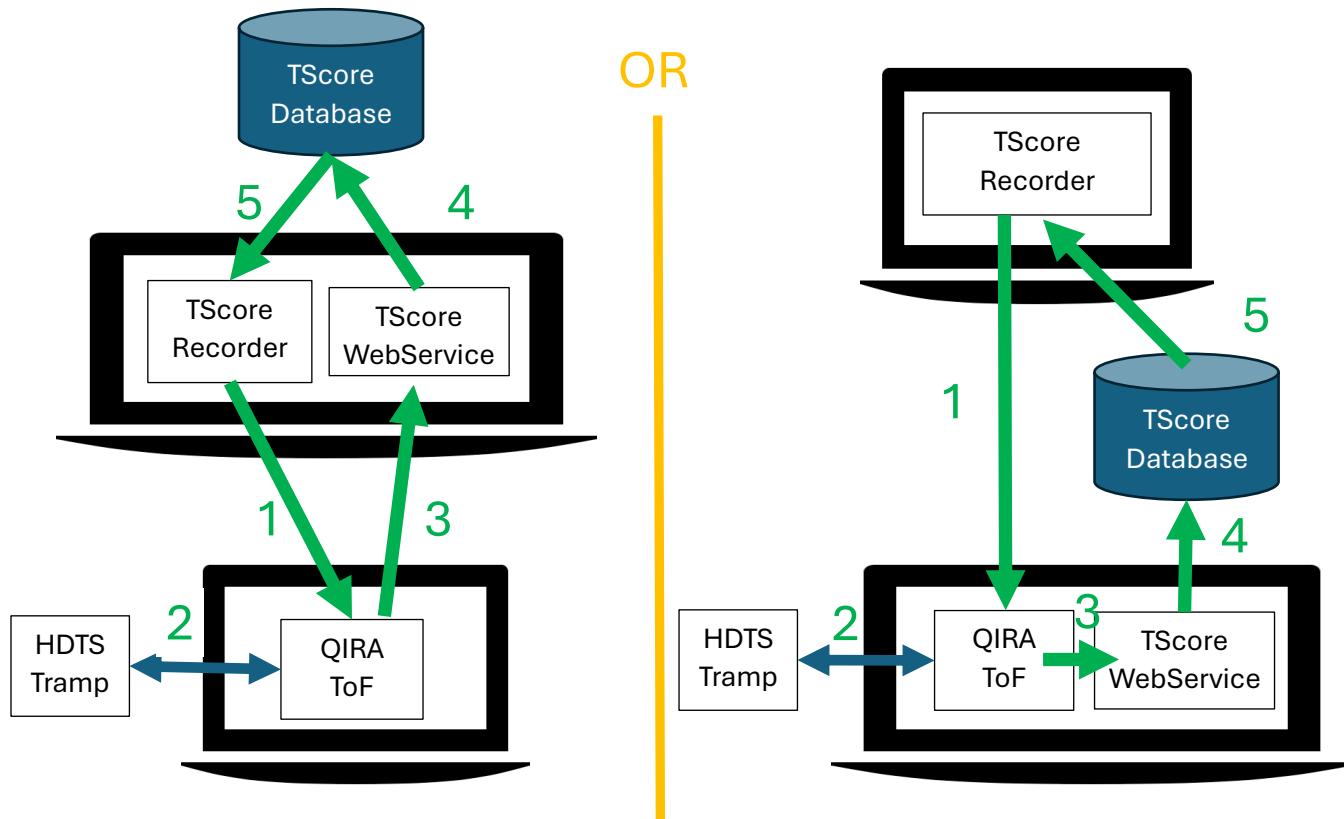

To communicate, each of the components has to know which computer the other component is running on (Its IP Address) and the number of the ‘port’ that the other computer is monitoring for data.

Each route needs to be allowed through the firewalls (if present). Windows will often prompt for this, but you can also run the TScore ‘SystemCheck’ PowerShell script to set the ones you need or do this manually.

The sequence of operations is as follows:


1. The TScore recorder selects the gymnast in the tablet scoring screen and clicks ‘Start Scoring’
TScore sends the gymnast details to QIRA, which displays them (Name, Club etc)
2. The Gymnast performs the routine with the QIRA operator doing the usual Start/Ed/Confirm actions.
3. Once the QIRA operator clicks ‘Confirm’ the results are sent to the TScore Webservice
4. The TScore Webservice pushes the results to the database
5. The TScore workstation detects the results and displays them for overall review and adjustment

Configuring the communication ports

Note that in the screenshots below, ALL components are running on a single computer (192.168.0.11).

The communications settings are applied as follows.

First you need to run QIRA on the chosen laptop, get it running properly (see the QIRA manual for instructions) and then set the address and port number for its listening service. This is done on the Config-Network screen

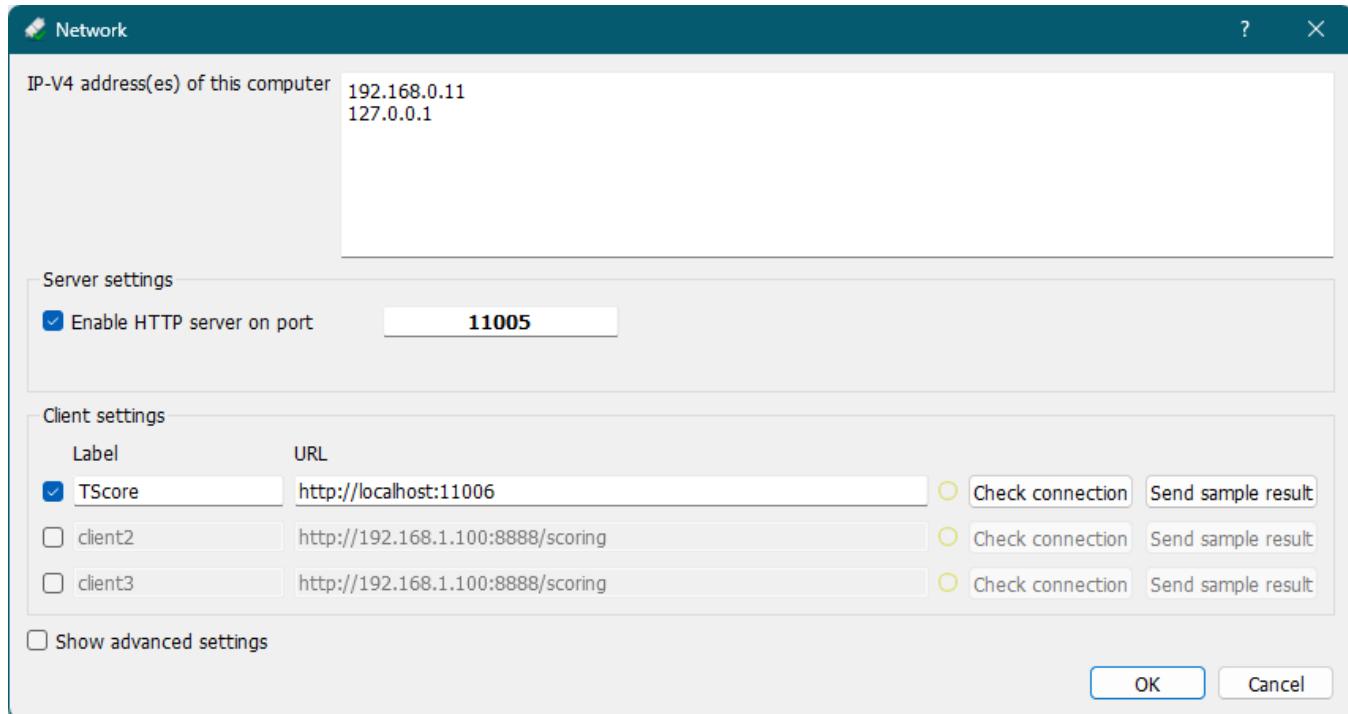

Turn on the HTTP Service and set the port to **11005**. This is where message from TScore will arrive.

You also need to instruct QIRA where to send its results. In our case, we want these to go to the TScore WebService.

In the Client setting bit of the screen above, turn on the first client and give it a helpful name (TScore). Then set the URL to the correct laptop and port. In this case, as we are running the TScore WebService on the same laptop as QIRA, the address can be given as <http://localhost:11006> (where 11006 will be the port number that the WebService will be listening to). <http://192.168.0.11:11006> would also work for example.

We will check the TScore connection later, once the TScore Web Service is running.


Click OK to save the settings.

If you do not have the HDTs equipment available, you will need to perform a File=>Open File operation to load a test routine and get to the main working screen for QIRA. There is a Routine1.dat sample provided in the TScore web service folder for this. Unless you do this, you will be stuck on the 'No USB' screen of QIRA.

Setting QIRA 'Autosave' options


It is strongly advised that you configure QIRA to automatically save each recorded routine to file. This lets you reload and resubmit results in the event of a connection failure. To do this, pick Config=>Autosave, check 'Enable autosave to file' and set a suitable folder to save the results.

Set the filename template to something helpful – we suggest {{date}}_{{time}}_{{Name}}_R{{Round}}

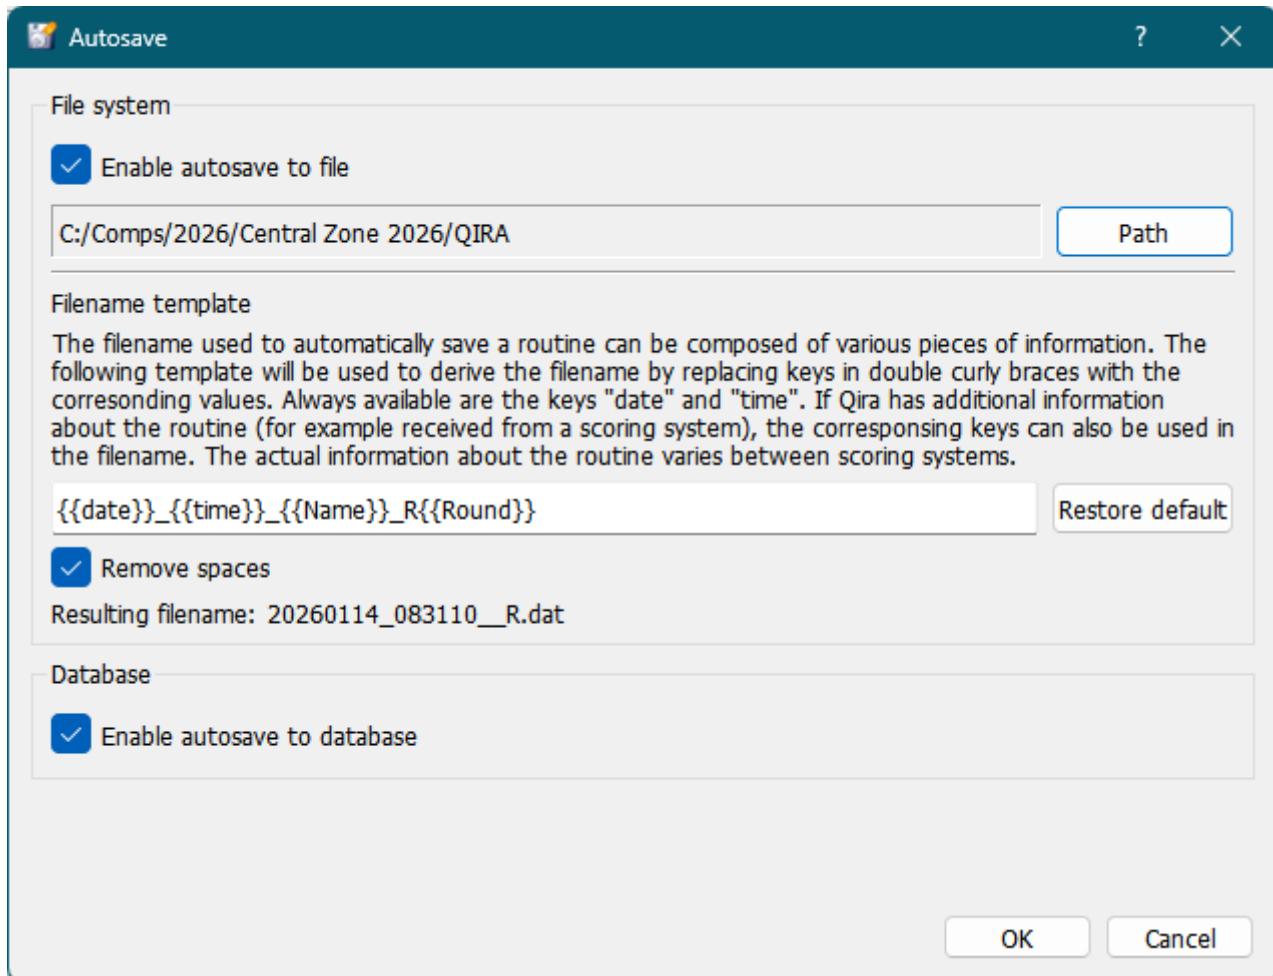

Configure the TScore WebService


Start the TScore WebService program C:\Program Files (x86)\TScore\TScore-WebService\TScoreWebService.exe

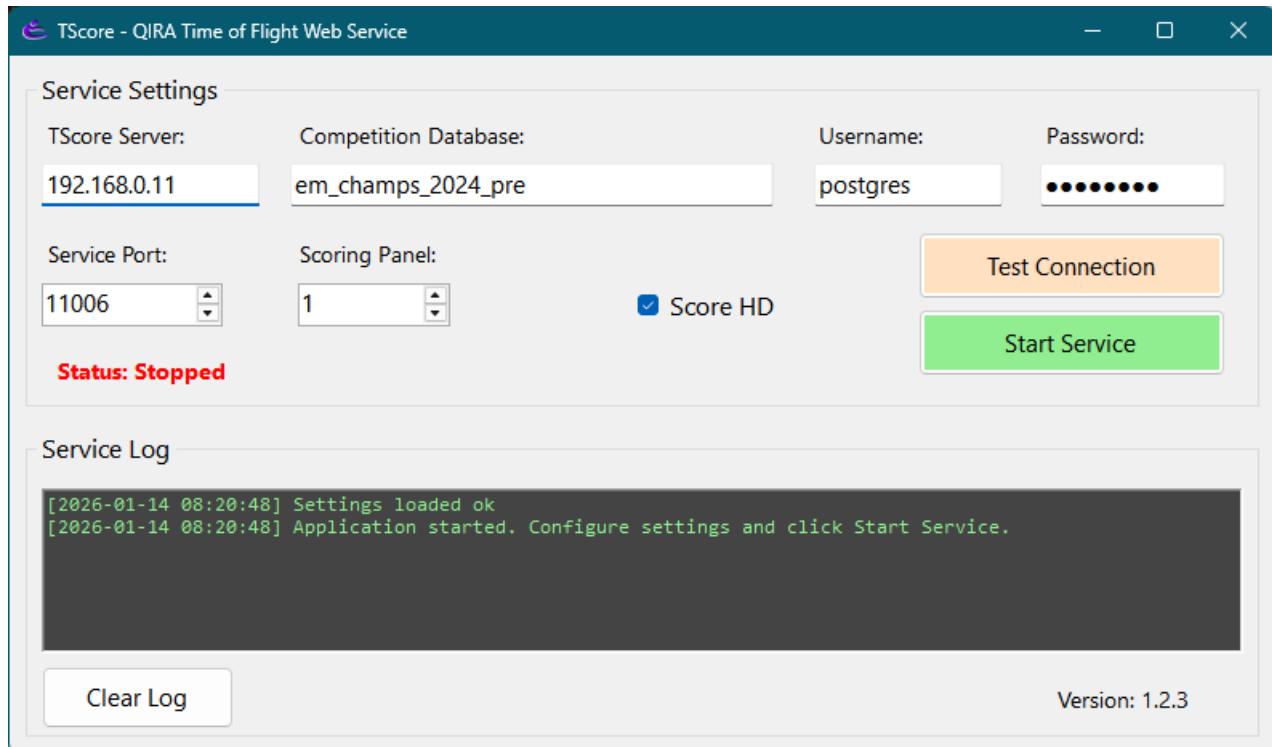

In here, you need to set the TScore database server address, the name of the competition database, and the PostgreSQL username and password. (these are usually both ‘postgres’). Leave the ‘Score HD box’ checked.

You can test the database connection by clicking the Test Connection button.


Now set the Port number for the service to ‘listen’ to – we suggest you use **11006** - and identify the scoring panel to which this particular QIRA relates. Click ‘Start Service’

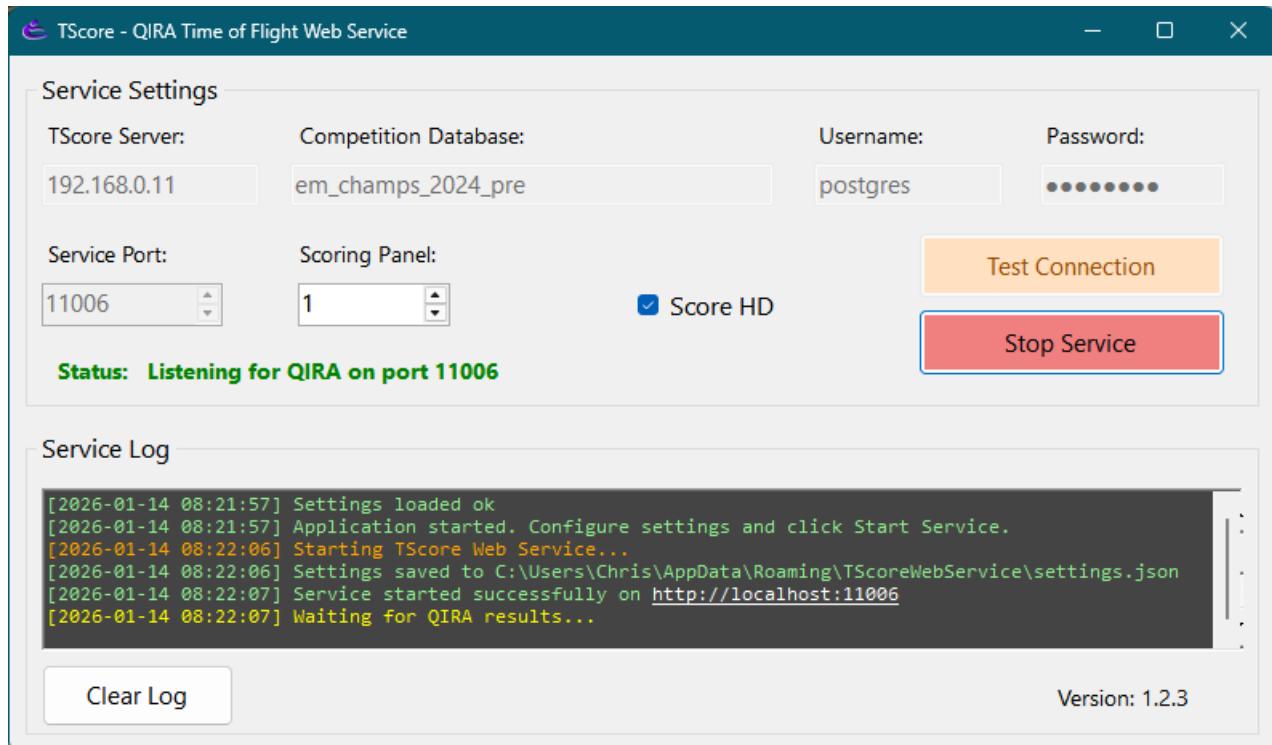

At this point you can hop back to the QIRA Network Config screen and click “Check Connection” for the TScore service. The light there should turn green and you will see a message in the TScore Web Service screen.

Configure TScore

In TScore, go to Preference – Panels and turn on the “Connected Time of Flight Equipment” switch

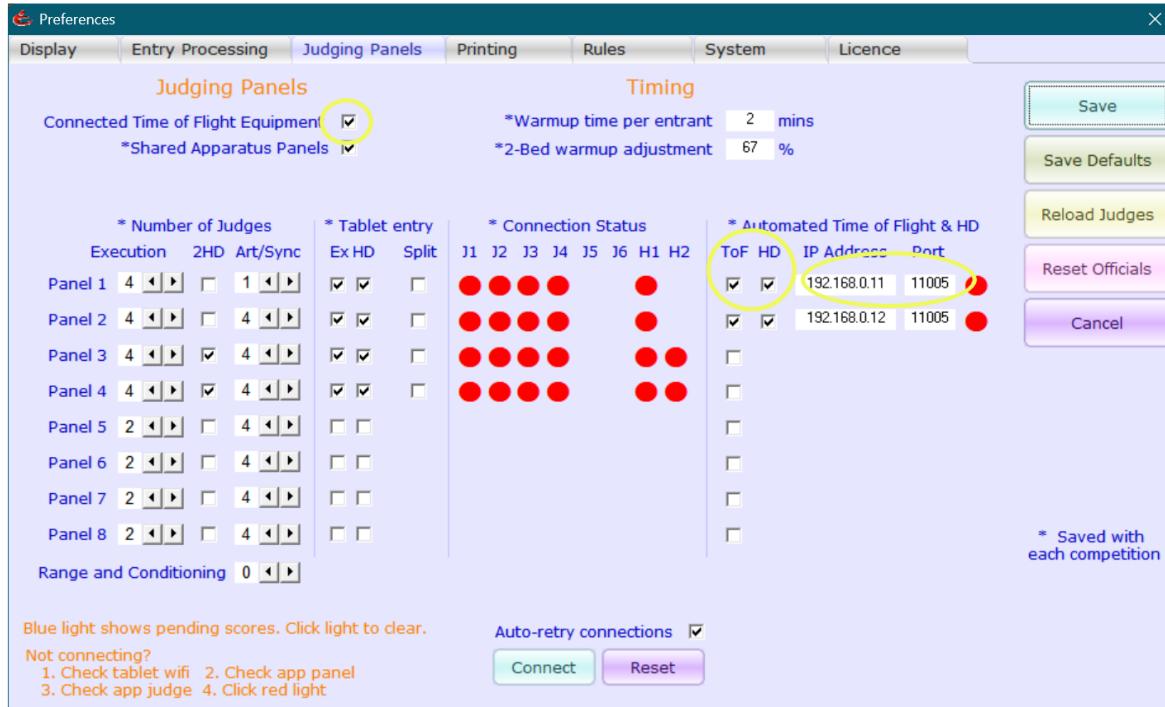


Then pick the ToF and HD boxes for each of panels that are using the QIRA system and fill in the IP Address and Port number to use. (To find the IP Address of the QIRA computer, just start a command shell and type `ipconfig`. The IPv4 value should be of the form 192.168.x.y. Alternatively, the QIRA network config screen shows its IP address.

Set a value of **11005** for the port number – this matches the QIRA HTTP Server configuration that you set above.

To test the connection to QIRA, just click the red light to the right of the port number. If all is well, the red light will change colour to cyan. (note – uncheck the ‘2HD’ box)

Click Save to save the settings.

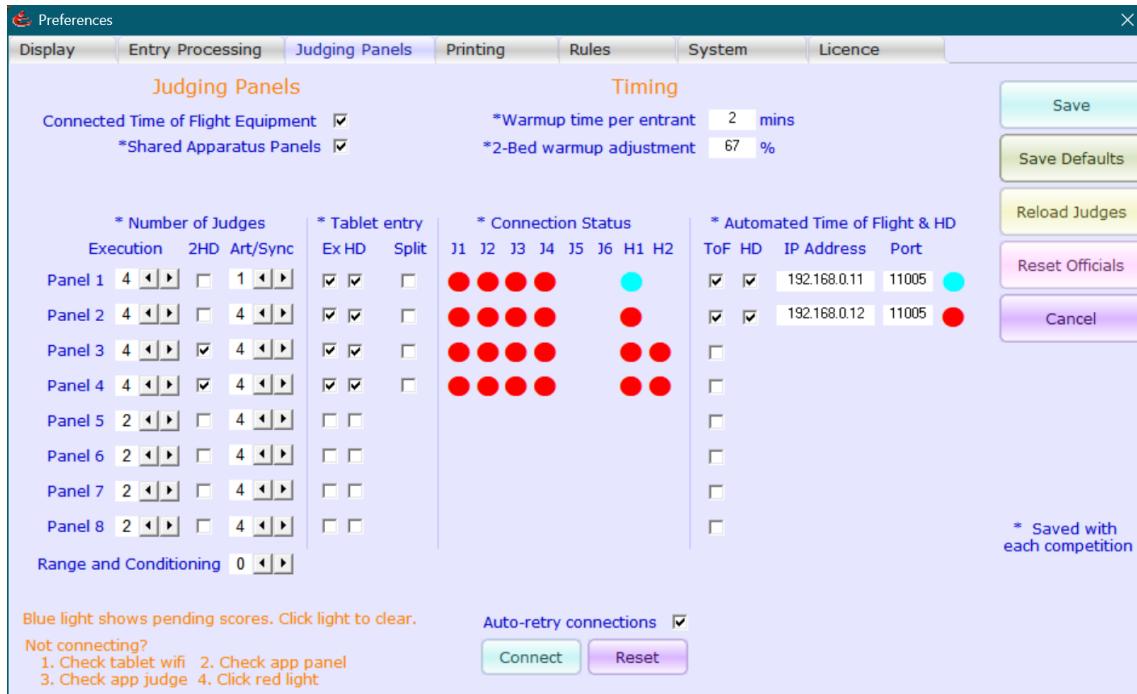


Now go to the TScore Scoring screen and choose a class that has Time of Flight and is on Panel 1.

You should see the usual tablet scoring screen, where you click Start Scoring



The lights start as red, then all turn amber as connections are acknowledged from the tablets and from QIRA.

In QIRA itself, you will see the gymnast's details appear:

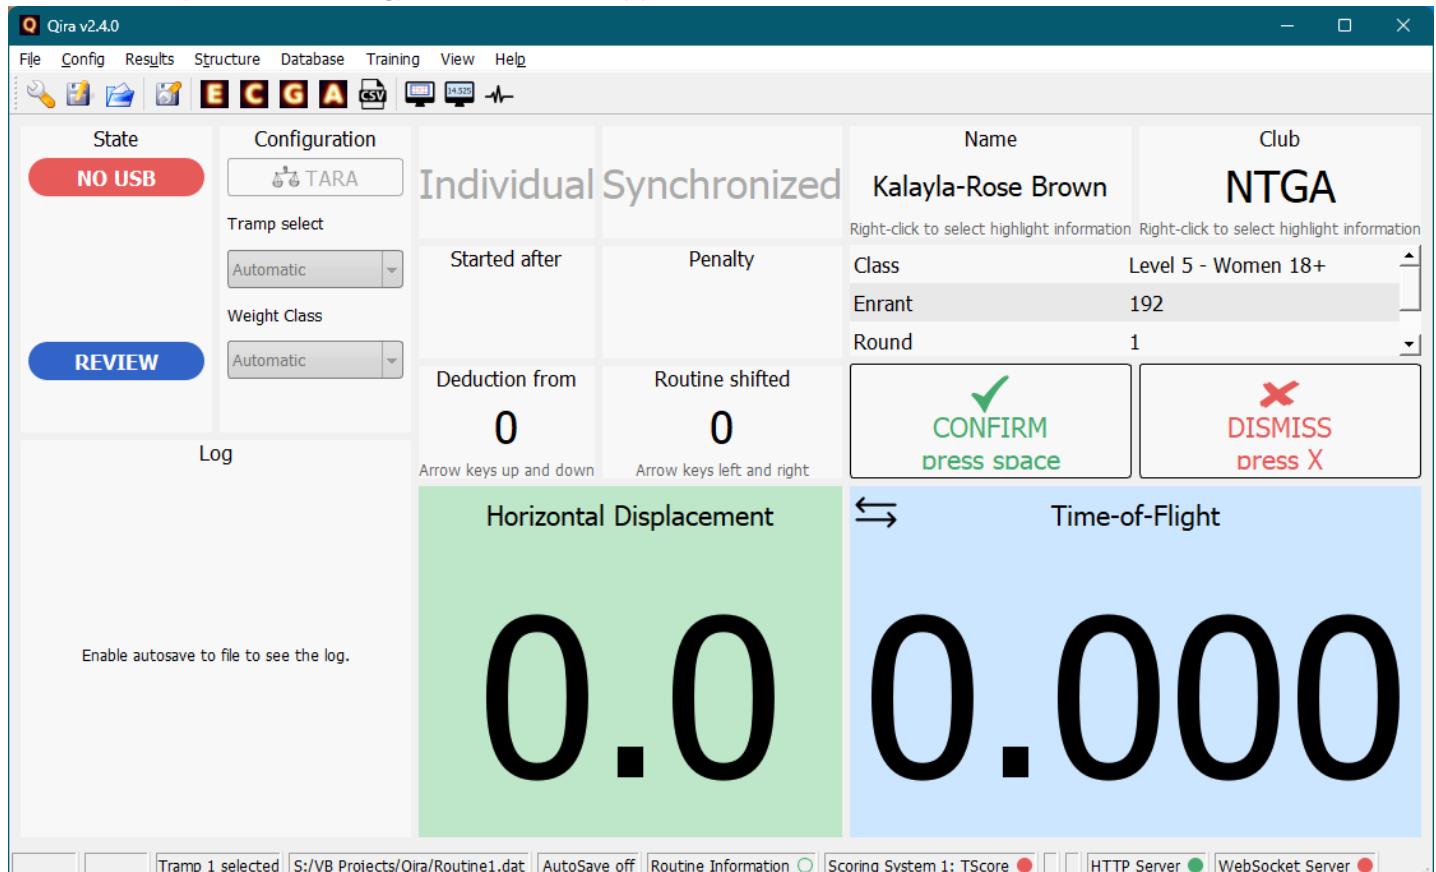

Note: You need to right click and pick 'Name' and 'Club' to show those details in the two Information boxes.

The Name and Club options are available the first time QIRA receives a 'Start Scoring' instruction from TScore.

You can now test the response from QIRA by opening its Config => Network dialog again and clicking the 'Send Sample Result' button for the TScore client.

You should immediately see the results listed in the TScore WebService window.

TScore - QIRA Time of Flight Web Service

Service Settings

TScore Server:	192.168.0.11	Competition Database:	zzz_test_em_rchamps_2024	Username:	postgres	Password:	*****
Service Port:	11006	Scoring Panel:	1	Test Connection			

Status: Listening for QIRA on port 11006

Stop Service

Service Log

```
[2025-11-08 17:27:43] Service started successfully on http://localhost:11006
[2025-11-08 17:27:43] Waiting for QIRA results...
[2025-11-08 17:29:37] Received routine result (length: 2806 chars)
[2025-11-08 17:29:37] Element 1: ToF: 1,735ms (1.735s), HD: 2
[2025-11-08 17:29:37] Element 2: ToF: 1,585ms (1.585s), HD: 0
[2025-11-08 17:29:37] Element 3: ToF: 1,570ms (1.570s), HD: 0
[2025-11-08 17:29:37] Element 4: ToF: 1,545ms (1.545s), HD: 2
[2025-11-08 17:29:37] Element 5: ToF: 1,500ms (1.500s), HD: 0
[2025-11-08 17:29:37] Element 6: ToF: 1,500ms (1.500s), HD: 0
[2025-11-08 17:29:37] Element 7: ToF: 1,520ms (1.520s), HD: 0
[2025-11-08 17:29:37] Element 8: ToF: 1,520ms (1.520s), HD: 0
[2025-11-08 17:29:37] Element 9: ToF: 1,505ms (1.505s), HD: 1
[2025-11-08 17:29:37] Element 10: ToF: 1,510ms (1.510s), HD: 0
[2025-11-08 17:29:37] Individual: 10 elements, ToF: 15.490s, HD: 9.50
[2025-11-08 17:29:38] Saved ToF for Kalayla-Rose Brown (-192), Round: 1
[2025-11-08 17:29:38] Saved HD for Kalayla-Rose Brown (-192), Round: 1
[2025-11-08 17:29:38] Updated Panel Status to ScoreOK
```

Clear Log

And then appear in TScore itself as the HD and ToF lights turn green.

EM Regn Champs 2024 TEST LOADING Hinckley Leisure Centre 13th October 2024

3 Entrants Day 1 Panel 1 11.00

Trampoline

Event: All **Panel: Panel 1** **Class: Level 5 - Women 18+** **Finish** **Print** **Edit** **Help** **Close**

Gymnast 1: Kalayla-Rose Brown **NTGA** **Stop Scoring**

Tablet Scoring **HD 9.50** **ToF 15.49** **Penalty** **Moves**

Judge 1 **Judge 2** **Median** **Execution** **Exec + HD** **Total** **Posn**

HD 1 2 0 0 2 0 0 0 0 1 0 9.50

Name	Club	Flt	Ord	R1	R2	Total	Posn	Wd
Kalayla-Rose Brown	NTGA	1						
Evie Baker	NTGA	1		38.59	40.89	79.48	1	
Freya Portrey	NTGA	1		24.99		24.99	2	

The Form judges enter their scores as usual on the tablets:

EM Regn Champs 2024 TEST LOADING Hinckley Leisure Centre 13th October 2024

Select Panel and Class 3 Entrants Day 1 Panel 1 11.00 Trampoline

Event: All Panel: Panel 1 Class: Level 5 - Women 18+

Gymnast 1: Kalayla-Rose Brown NTGA

Tablet Scoring: 1 2 3 4 5 6 7 8 9 10 End Score (Judge 1: 8.1, Judge 2: 7.4)

HD: 9.50 ToF: 15.49 (Clear)

Median: 15.50 Execution: 15.50 Exec + HD: 25.00 Total: 40.49 Posn:

Penalty: Moves:

Start Scoring Save Undo Zero Score Cancel Clear All

Name	Club	Flt	Ord	R1	R2	Total	Posn	Wd
Kalayla-Rose Brown	NTGA	1						
Evie Baker	NTGA	1		38.59	40.89	79.48	1	
Freya Portrey	NTGA	1		24.99		24.99	2	

You can then set the difficulty, penalties etc. and save the scores.

Note that if the gymnast has an interrupted routine, the 'Moves' box will be set according to the moves counted in QIRA. You can subsequently override this by typing the number of moves yourself. The Execution, HD and ToF scores are adjusted accordingly.

EM Regn Champs 2024 TEST LOADING Hinckley Leisure Centre 13th October 2024

Select Panel and Class 3 Entrants Day 1 Panel 1 11.00 Trampoline

Event: All Panel: Panel 1 Class: Level 5 - Women 18+

Gymnast 1: Kalayla-Rose Brown NTGA

Tablet Scoring: 1 2 3 4 5 6 7 8 9 10 End Score (Judge 1: 5.8, Judge 2: 5.4)

HD: 8.05 ToF: 10.96 (Clear)

Median: 11.20 Execution: 11.20 Exec + HD: 17.80 Total: 28.76 Posn: 1

Flight times per move:
1=1.735 2=1.585 3=1.570 4=1.545 5=1.500
6=1.500 7=1.520 8=1.520 9=1.505 10=1.510

Penalty: Moves: 17

Start Scoring Save Undo Zero Score Clear All

Name	Club	Flt	Ord	R1	R2	Total	Posn	Wd
Kalayla-Rose Brown	NTGA	1		40.49		40.49	2	
Evie Baker	NTGA	1		38.59	40.89	79.48	1	
Freya Portrey	NTGA	1		24.99		24.99	3	

If for any reason you need to manually override the ToF, then use the 'Clear' button to remove the per-move scores in the background before entering your new total (otherwise it will just be reset when it recalculates them!)

For Synchro, operation is broadly similar, but you will see a Synchro store rather than ToF, and there will be 2 sets of HD scores displayed.

TScore Tablet Scoring Entry – General Advice and troubleshooting

The QIRA integration relies on the use of the TScore Tablet entry system. Instructions for this are covered elsewhere, but here are a few handy tips.

1. Do not use a ‘public’ Wi-Fi!
 - a. The network may get swamped once spectators arrive
 - b. Peer-to-peer communications may be blocked
 - c. Specific network ports may be blocked (5432, 8080, 8088, 11000-11006)
 - d. FTP may be blocked
 - e. DHCP may kick you off if it gets busy
 - f. Use power banks for each tablet to avoid battery issues. Tablet battery lifetime varies dramatically by vendor and model. You can power them directly, but the use of power banks saves a lot of cabling.
2. Configure your tablet network connection to use a static IP address
 - a. Use the subnet of your router: Normally 192.168.0.x or 193.168.1.x
 - b. Disable DHCP on your router(s)
 - c. Manually assign discrete ranges for device types.
(e.g. Routers and Database server .0 to .9, Laptops .11 to .99, Tablets .201 to .250)
 - d. When setting Tablet IP Addresses, set DNS to 0.0.0.0 - this can reduce tablet ‘network hopping’
 - e. Enable Android Developer Mode to control screen blanking / power-saving etc
 - f. Disable any automatic network switching options and power-saving
3. If the tablets stop responding, these are the things to check
 - a. Does the ‘Refresh’ button load the next competitor ok? If so, use this workaround until you can get to a short pause in proceedings
 - b. Is the tablet still connected to the correct wi-fi? (in v3.1.4 click the bottom right button to check)
 - c. Go to the tablet’s Internet settings and turn the wi-fi off and on again, ensuring it connects to the correct network. (You can click ‘Reconnect’ in the app to take you straight to the settings screen)
 - d. If this still doesn’t work, stop and restart the TScore app
 - e. If this still doesn’t work, stop and restart the tablet
4. Intermittent failures / dropped connections
 - a. Check for other signals interfering with the wi-fi. Prime candidates are:
 1. Someone with a cell phone running a hotspot in close proximity (3m or less) to your router;
 2. Network/usb adapters too close to the router (< 30cm or so).Either of these can cause the router to switch off its signal!
 - b. Use an Android app such as ‘WiFi Analyzer’ to see the signals from your router and possible conflicting sources. You may need to swap your router to a less congested channel (although most devices auto-hop to find space these days).
 - c. Be sure to ‘forget’ any other wi-fi connections on your tablet if they are within range. Tablets will often try other networks to try to find an Internet connection.
 - d. When you connect to your wi-fi, you may get a prompt saying something like ‘no Internet connection available. Do you want to stay on this network?’ Check the ‘do not ask me again’ box and click **Yes**.
 - e. There is a useful developer mode switch on Android to ‘Enable Wi-Fi verbose logging’, which shows possibly helpful connection details in the Wi-Fi select options screen.